



Light Source

2835 SMD

Substrate

Copper 3Oz

Solder Pad

Immersion gold

Color Temperature

3000K 4000K 5000K 6500K

CRI

95

MacAdam Ellipse

6-Step

Input Voltage

DC 24V

Operating Temperature

-20°C~+45°C



Degree of Protection

IP00

Package

10m/reel

SunLike Eco flexible strip contains 154 pieces 2835 LEDs per meter. The continuous and saturated spectrum is very close to the actual sunlight. With a high color rendering index of CRI95 and blue light reduction, it creates a healthy lighting environment for human beings. A 3Oz copper substrate and a current stabilization system ensure a good heat transfer and a homogeneous light output from the beginning to the end of the LED strip.

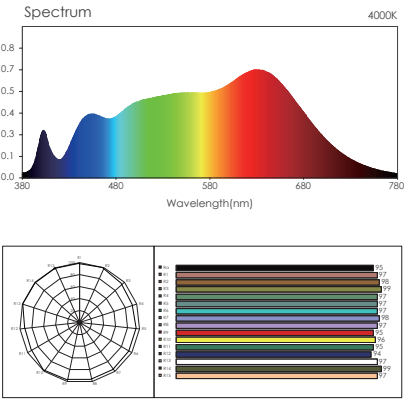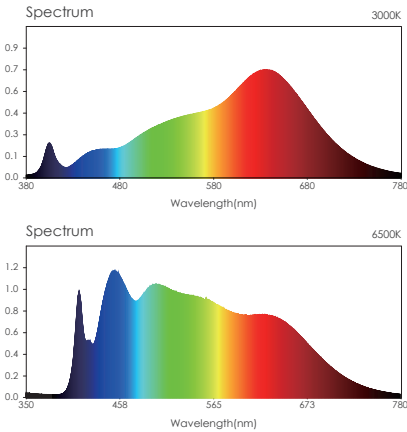

Article No.	Type	LEDs	LEDs/m	Volt(DC)	Power(W)	Angle(°)	CCT(K)	CRI	Flux(lm)	Max Length(m)
Sc2425309510SE	CC	2835	154	24V	25	120	3000	95	1715	5
Sc2425409510SE	CC	2835	154	24V	25	120	4000	95	1780	5
Sc2425659510SE	CC	2835	154	24V	25	120	6500	95	1960	5

