



### Light Source

Tyanshine

### Max Input Current(mA)

160(3W) 480(6W) 600(10W)

### Material

Cold forging AL 1070 + PC Reflector

### Wavelength(nm)

620-630(R) 520-530(G) 460-470(B)

### Beam Angle(3W 6W)

30° 36° 45° 60°

### Degree of Protection


IP40

### Beam Angle(10W)

35° 45° 60°

### Color

RGB

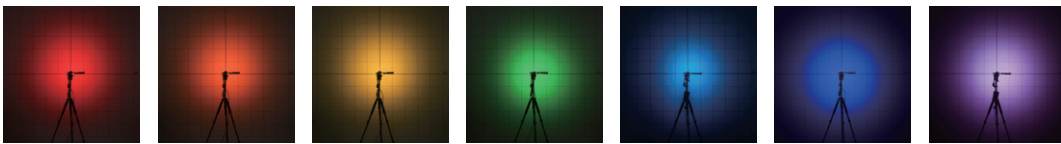

Article No.	LEDs	Color	Power(W)	CC(mA)	Voltage(V)	Angle(°)	Flux(lm)
M-3-45-RGB	Tyanshine	R	2.5	160	15.6	45	126
M-3-45-RGB	Tyanshine	G	2.6	160	16.4	45	175
M-3-45-RGB	Tyanshine	B	2.8	160	17.2	45	36
M-6-45-RGB	Tyanshine	R	5.3	350	15.7	45	202
M-6-45-RGB	Tyanshine	G	5.9	350	16.9	45	378
M-6-45-RGB	Tyanshine	B	6.4	350	18.3	45	62
M-10-45-RGB	Tyanshine	R	7.8	500	15.5	45	305
M-10-45-RGB	Tyanshine	G	9.9	500	18.7	45	484
M-10-45-RGB	Tyanshine	B	9.3	500	19.7	45	115

