



### Light Source

CSP

### Input Current

CC 350mA CC 500mA

### Material

Cold forging AL 1070 + PC Reflector

### Degree of Protection

IP40

### Beam Angle(6W)


50° 65°

### Beam Angle(9W)

40° 48° 63°

### Color Temperature

RGB 2700K 3000K 4000K

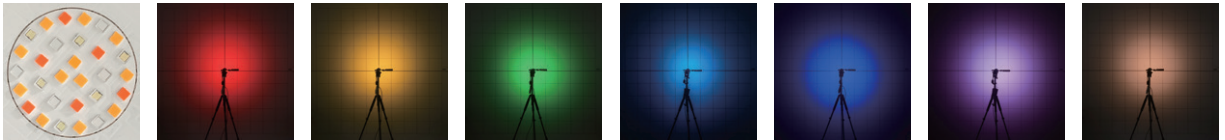

Article No.	LEDs	Color	Power(W)	CC(mA)	Voltage(V)	Angle(°)	CCT(K)/Wavelength(nm)	CRI	Flux(lm)
M-6-50-RGB30-90	Vector	R	6	350	18	50	620-630	-	140
M-6-50-RGB30-90	Vector	G	6	350	17	50	520-530	-	490
M-6-50-RGB30-90	Vector	B	6	350	18	50	460-470	-	90
M-6-50-RGB30-90	Vector	W	6	350	17	50	3000	90	510
M-9-40-RGB30-90	Vector	R	9	500	18	25	620-630	-	160
M-9-40-RGB30-90	Vector	G	9	500	18	25	520-530	-	540
M-9-40-RGB30-90	Vector	B	9	500	19	25	460-470	-	110
M-9-40-RGB30-90	Vector	W	8	500	17	40	3000	90	780

