


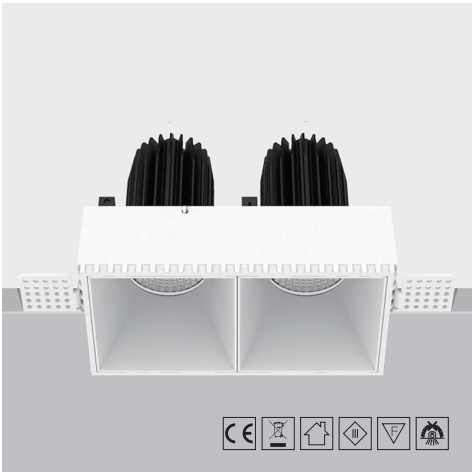

Light Source

Bridgelux

MacAdam Ellipse

2-Step

Front Material

Die-cast aluminum + PC

Module Compatibility

Source diameter 49.6mm

Color Temperature

2700K 3000K 4000K

Degree of Protection


IP40

CRI

97 90 80

Beam Angle

15° 28° 40° 60°

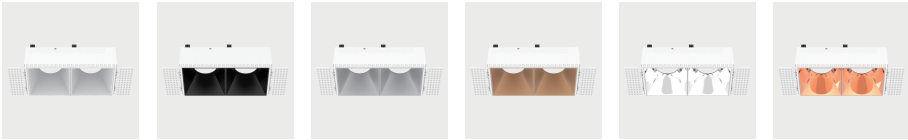

Article No.	LED	P(W)	CC(mA)	Voltage(V)	Angle(°)	CCT(K)	CRI	Color	Flux(lm)
VR-TLS-TW-MW-M-6-40-30-90	V8	6.1	350	17.4	40	3000	90	Matt White	530*2
VR-TLS-TW-MB-M-6-40-30-90	V8	6.1	350	17.4	40	3000	90	Matt Black	450*2
VR-TLS-TW-MS-M-6-40-30-90	V8	6.1	350	17.4	40	3000	90	Matt Silver	500*2
VR-TLS-TW-MC-M-6-40-30-90	V8	6.1	350	17.4	40	3000	90	Matt Copper	480*2
VR-TLS-TW-CH-M-6-40-30-90	V8	6.1	350	17.4	40	3000	90	Chrome	520*2
VR-TLS-TW-CG-M-6-40-30-90	V8	6.1	350	17.4	40	3000	90	Chrome Gold	520*2
VR-TLS-TW-CR-M-6-40-30-90	V8	6.1	350	17.4	40	3000	90	Chrome Rose	520*2
VR-TLS-TW-MW-M-9-40-30-90	Vero 10	8.9	350	25.3	40	3000	90	Matt White	820*2
VR-TLS-TW-MB-M-9-40-30-90	Vero 10	8.9	350	25.3	40	3000	90	Matt Black	690*2
VR-TLS-TW-MS-M-9-40-30-90	Vero 10	8.9	350	25.3	40	3000	90	Matt Silver	760*2
VR-TLS-TW-MC-M-9-40-30-90	Vero 10	8.9	350	25.3	40	3000	90	Matt Copper	740*2
VR-TLS-TW-CH-M-9-40-30-90	Vero 10	8.9	350	25.3	40	3000	90	Chrome	820*2
VR-TLS-TW-CG-M-9-40-30-90	Vero 10	8.9	350	25.3	40	3000	90	Chrome Gold	820*2
VR-TLS-TW-CR-M-9-40-30-90	Vero 10	8.9	350	25.3	40	3000	90	Chrome Rose	820*2

